


CT30R

SEMI-AUTOMATIC, AIR ASSISTED,
RANDOM-SIZE CARTON CASE TAPER



Automatically adjusting to accommodate varying carton dimensions, and with a maximum speed of 1,200 cartons per hour, the CT30R provides heavy duty, reliable case taping for high-volume packing and despatch areas.

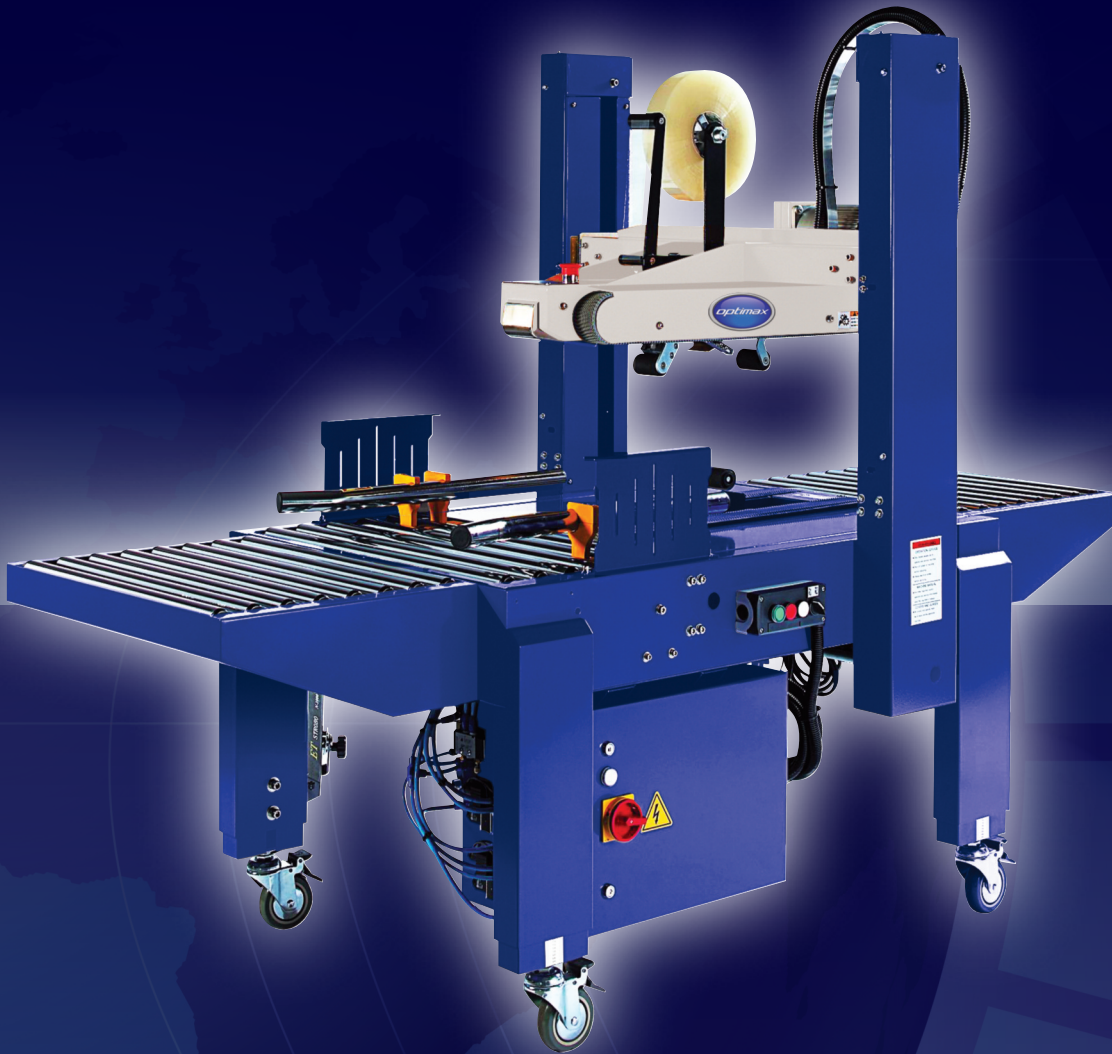


CT30R

SEMI-AUTOMATIC, AIR ASSISTED,
RANDOM-SIZE CARTON CASE TAPER

Features include:

- > Automatically adjusts to accommodate varying carton dimensions.
- > Simple use and maintenance
- > Seals up to 1200 cartons per minute
- > Seals 150 - 500mm wide and 120 - 500mm high cartons
- > Outfeed and infeed conveyors as standard
- > Braking swivel castors
- > Adjustable table height option
- > Reliable, energy efficient operation

Maximum/minimum carton
dimensions capacity

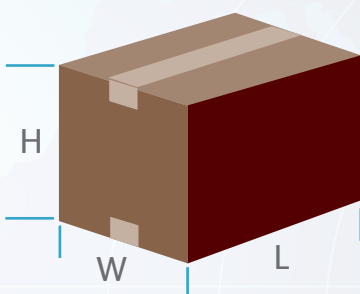

| | Min | Max |
|----|-----|-----|
| L: | 120 | ∞ |
| W: | 150 | 500 |
| H: | 130 | 500 |




Specifications

| | |
|----------------------|--|
| Model: | CT30R |
| Tape width: | 37.5mm (1.5") or 50mm (2") |
| Belt speed: | 23mtr per minute (9-20 cartons/min) |
| Carton capacity: | Length = 120mm - ∞ Width = 140 - 500mm Height = 120- 500mm |
| Power supply: | 240V, 50Hz 1-phase |
| Power consumption: | 450W |
| Machine dimensions: | 1170 x 930 x 1550mm (L x W x H) |
| Machine nett weight: | 153kg |

Options

- > 3" taping head
- > Safety guard

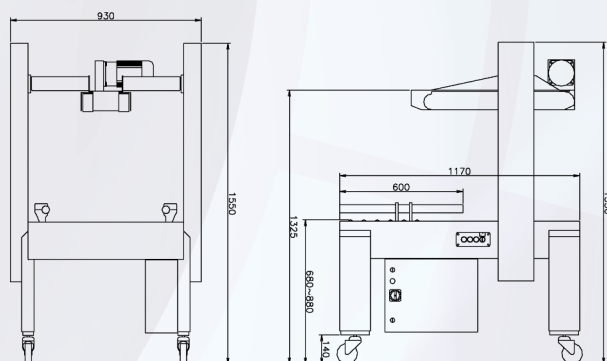

info

The CT30R is an air assisted model that requires a compressed air supply.

Please contact our technical service centre for more information.

For more information on the complete range of Optimax® packaging products, please contact your authorised Optimax® distributor or visit:

www.optimaxproducts.com

©Copyright Optimax 2015
We reserve the right to change product specifications without prior notice
Re-order Code: LIT-PS017