

Increase Pallet Wrapping efficiency with Optimax® Pallet Stretch Wrappers

PSW001

The Optimax® PSW001 Pallet Stretch Wrapper provides preset programming and consistent wrap quality for the packaging professional.

Ideal for low volume applications, the PSW001 is capable of wrapping 20-25 pallets per hour. Offering low maintenance and proven reliability, the PSW001 is the perfect choice for first-time investment in automated stretchwrapping.

Features include:

- > 1650mm turntable with 2000mm wrapping height
- > spring brake stretch
- > home position: the turntable always stops at the same position
- > pallet height photo sensor
- > choose between 3 bottom wraps and 2 top wraps or 2 bottom wraps and 1 top wrap
- > adjustable tension
- > soft-start and stop
- > machine can be paused during cycle
- > magnetic brake holds turntable still during loading and unloading
- > audible warning during cycle
- > safety switch to prevent foot pinch



Simple to use electronic control system.

Info

Specifications


| | |
|----------------------|--------------------|
| Max Wrapping Height: | 2000m |
| Max Turntable Speed: | 10rpm |
| Max Loading Weight: | 1200kg |
| Turntable Diameter: | 1650mm |
| Power Supply: | 230-240V, 13A |
| | 50-60Hz |
| Power Consumption: | 0.8Kw |
| Machine Dimensions: | 1650 x 2550 x 2358 |
| | w x d x h (mm) |

PSW011

Ramp for PSW001

Features

- > Fits to PSW001 turntable
- > Facilitates easy loading/unloading of pallets using a pallet truck

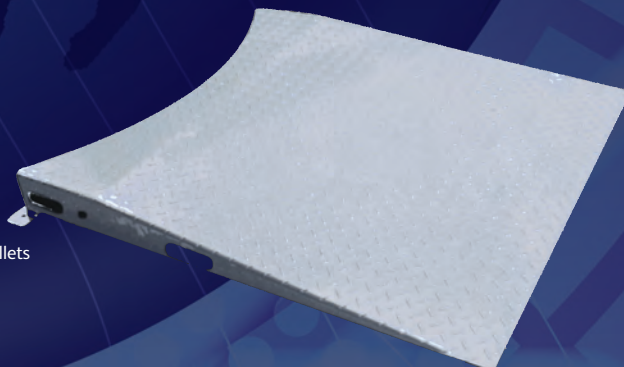

PSW002

The Optimax® PSW002 Pallet Stretch Wrapper maximises film use by pre-stretching the film by 300% during application.

An advanced electronic control system allows greater versatility, delivering optimum results for every pallet wrapping application.



Electronic control system.

Features include:

- > 300 % power pre-stretch
- > 1650mm turntable with 2000mm wrapping height
- > home position: the turntable always stops at the same position
- > pallet height photo sensor
- > adjustable tension, turntable and carriage speed
- > soft-start and stop with cycle pause function
- > choice of automatic or manual modes
- > 180 degree rotating control box
- > trouble shooting information displays on screen
- > safety switch to prevent foot pinch
- > advanced soft wrapping
- > automatic reinforced strapping feature
- > automatic film pin puncture
- > one way idler roller (designed to allow film tail to stay outside of carriage)

Info

Specifications

Max Wrapping Height: 2000m
 Max Turntable Speed: 12rpm
 Max Loading Weight: 1200kg
 Turntable Diameter: 1650mm
 Power Supply: 230-240V, 13A
 50-60Hz
 Power Consumption: 1.2Kw
 Machine Dimensions: 1650 x 2550 x 2358
 w x d x h (mm)

Advanced Soft Wrapping Feature

Advanced soft wrapping regulates the film tension as the pallet rotates to avoid over-tensioning on corners, which can cause carton damage.




PSW012

Ramp for PSW002

Features

- > Fits to PSW001 turntable
- > Facilitates easy loading/unloading of pallets using a pallet truck

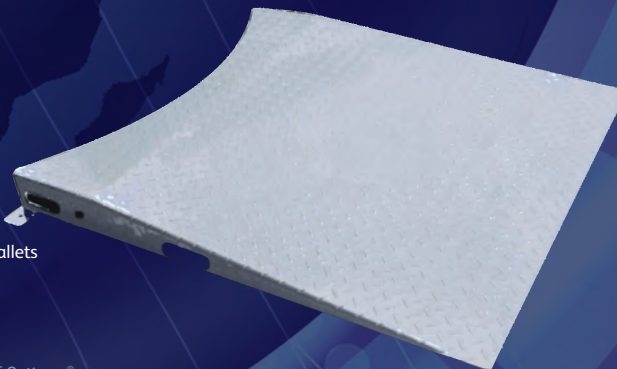

For more information on the complete range of Optimax® packaging products, please contact your authorised Optimax® distributor or visit:

www.optimaxproducts.com

©Copyright Optimax 2016
 We reserve the right to change product specifications without prior notice
 Re-order Code: LIT-PS010
 Optimax® is a registered trademark of Packaging Brands Ltd.

